Print Server with 1 Parallel Port

Product Overview
The LevelOne FPS-1031 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network. This print server is equipped with a 10/100Mbps auto-sensing Ethernet port and a DB-36-pin male bi-directional Centronic port that connects to parallel printers.

Multi OS and Network Printing Protocol Support
The FPS-1031 is a print server with 1 parallel port that supports Windows ME, 2000, XP and Vista operating systems as well as Mac OS 8.1 and higher, UNIX/Linux and Netware (Bindery/NDS).

Network Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB over TCP/IP for flexible use with different network clients connected to the same office network. The FPS-1031 also includes Internet Printing Protocol (IPP) support and Windows Print Monitor Technology to monitor printing jobs received.

Easy Installation Wizard
The LevelOne FPS-1031 is easily configurable using a Web Browser or the Windows based configuration program included with the CD-ROM. The print server is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the Windows set-up program or the Web based user interface.

FPS-1031

Key Features

- Parallel print server for network print sharing
- Fast Ethernet network connectivity
- Easy set-up wizard included
- Web based user interface
- Support multiple operating systems
- Support multiple network printing protocols

Technical Specification

Device Specifications

Standards Compliance
- IEEE 802.3 10Mbps Ethernet
- IEEE 803.2u 100Mpbs Fast Ethernet

Network Interface
- 1x 10/100Mbps Auto-sensing RJ-45 port
- 1x DB-36 pin male Centronic (bi-directional)
- DHCP Client

Operating System Support
- Windows ME, 2000, XP , Vista
- Mac OS 8.1 or higher
- UNIX/Linux
- NetWare (Bindery/NDS)

Network Print Protocol Support
- TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP, Internet Printing Protocol (IPP)

Software Upgradeable
- Web interface
- Windows-based Setup Program
- TFTP

Device Management
- Web-based user interface
- Windows-based Setup Program
- SNMP & HP Web JetAdmin Support

Physical Specifications

LEDs
Power/Status, Link, Activity

Power Supply
3.3V, 2A

Dimension
59mm (L) x 57mm (W) x 23mm (H)

Weight
52g

Operating Temperature and Humidity
Operating: 0°C ~ 50°C @ 0% ~ 70% (non-condensing)
Storage: -5°C ~ 65°C @ 0%~ 80% (non-condensing)

EMI Certifications
CE, FCC Class B

Digital Data Communications GmbH.
Zeche-Norm St. 25, 44319, Dortmund, Germany
All mentioned brand names are registered trademarks and property of their owners.
Technical specifications are subject to change without notice.
© 2008 All Rights Reserved

Product Diagram

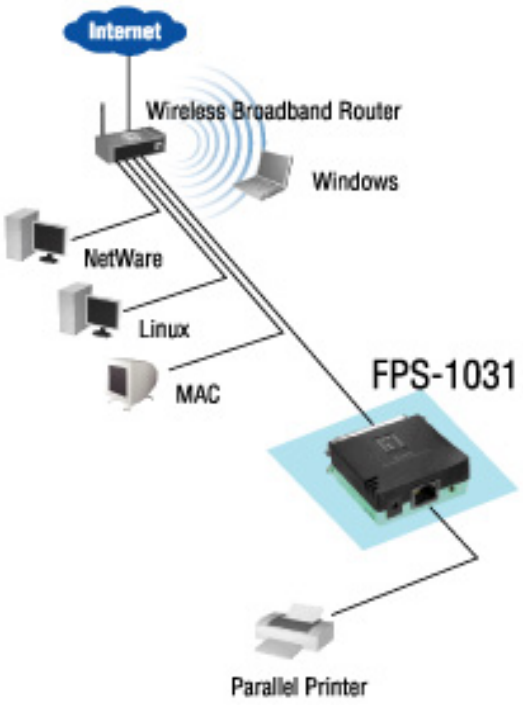

Order Information

FPS-1031: Print Server w/ 1 Parallel Port

Package Content

-FPS-1031
-Power Adapter
-CD Manual/Driver/Utility
-Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners.
Technical specifications are subject to change without notice.
© 2008 All Rights Reserved